

Lexmark T640rn

Additional Accessories

Connectivity	MarkNet™ N7000 Series External Print Servers	
	N7000e Fast Ethernet - 1 port - USB	14T0230
	N7002e Fast Ethernet - 1 port - Parallel	14T0240
	N7020e Gigabit Ethernet - 4 port - USB	14T0220
	MarkNet N4000e Ethernet 10/100BaseTX	14T0030
	Wireless	
	N4050e 802.11g Print Server	14T0145
	802.11g Print Adapter	1010042
Cable Options	USB 6-foot Cable	1021294
	Parallel 10-foot high speed bidirectional Cable	1021231
Print Media	Transparencies	70X7240

Lexmark T640rn



- Program RFID tag while printing
- High-performance workgroup printer
- Broad range of paper-handling options
- Advanced user interface for easy operation

Lexmark, Lexmark with diamond design, MarkVision and MarkNet are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett-Packard Company. All other trademarks are the property of their respective owners. © 2006 Lexmark International, Inc. All rights reserved.



Lexmark T640rn

- EPC Global Class 1, Generation 2 tag compatible
- ImageQuick standard for fast graphic printing
- USB Direct interface for quick walk-up printing from USB flash memory drive
- Optional 802.11g wireless networking



Lexmark T640rn


Product Specifications

Part Number	US/Canada: 20G1500
Product Class	Small workgroup laser printer
Speed	Up to 35 ppm (up to 12 ppm with RFID media)
Resolution	1200 x 1200 dpi, 2400 image quality, 1200 image quality, 600 x 600 dpi
Time to First Page	As fast as 6 seconds
Processor	400 MHz
Memory (std./max.)	192MB/576MB
Electronic Forms	Forms Card and 32MB Flash Memory included
Connectivity	Standard Ethernet, Parallel, USB, USB Direct Interface Network Mgmt. Utility MarkVision™ Professional
Operating Systems	Windows, Linux, UNIX, Mac, NetWare, and OS/400 For a complete list, visit www.lexmark.com.
Printer Languages	PostScript 3 and PCL 6 emulations, PPDS Migration Tool
Direct Print Formats	PDF v1.5, JPEG, JPG, TIFF, GIF, PNG, BMP, PCX and DCX
Fonts	PCL: 89 scalable, 2 bitmapped. Includes OCR-A, OCR-B and Code 3 of 9 bar codes; PostScript: 158 scalable; PPDS: 39 scalable and 5 bitmapped
Size (WxDxH)	16.6 in. x 19.6 in x 13.6 in. (421 mm x 498 mm x 345 mm)
Weight	38 lb. (17.4 kg)
Acoustics	53 dBA printing; 30 dBA idle
Duty Cycle	Up to 200,000 pages per month ¹
Warranty	1-year Onsite Repair

Media Specifications

Paper Capacity² (sheets)	
Standard Input	350 (250+100 MPT)
Maximum Input	3,850
Standard Output	250
Maximum Output	2,750
Paper Sources	
Standard Input	2
Maximum Input	7
Standard Output	1
Maximum Output	11
Media Types	Plain paper, bond, envelopes, card stock, transparencies, paper labels ³ , dual-web labels ³ , polyester labels ³ , vinyl labels ³
Media Sizes	Letter, legal, A4, A5, JIS B5, statement, executive, folio, universal (2.75 x 5 in. to 8.5 x 14 in.), and envelopes (7 ³ / ₄ , 9, 10, DL, C5, B5, other)
Media Weights	Plain paper: 16 to 47 lb. (60 to 176 g/m ²); Card stock: up to 110 lb. Index (199 g/m ²)
RFID Labels	EPC Global Class 1, Generation 2 compatible ⁴

In the Box



Lexmark T640rn


- Lexmark T640n Printer
- 21,000-page Return Program Print Cartridge for labels⁵
- Power Cord
- Publications CD
- Drivers and Utilities CD
- Forms Card
- RFID Enabled

Lexmark T640rn

Supplies & Accessories

Supplies	21,000-page High Yield Return Program Print Cartridge ⁵ 21,000-page High Yield Print Cartridge ⁵ 21,000-page High Yield Return Program Print Cartridge for Labels ⁵ 6,000-page Return Program Print Cartridge ⁵ 6,000-page Print Cartridge ⁵ Staple Cartridge Routine Maintenance Item: Maintenance Kit	64015HA ⁶ 64035HA ⁶ 64004HA ⁶ 64015SA ⁶ 64035SA ⁶ 11K3188 40X0100
Memory/Flash Options	256MB DDR RAM 512MB DDR RAM 64MB Flash Card	13N1524 13N1526 1021209
Furniture	Low Profile Printer Stand Printer Stand with Cabinet Printer Stand T6xx Printer Base	16C0379 16C0369 16C0389 22G0544

Paper Handling Options

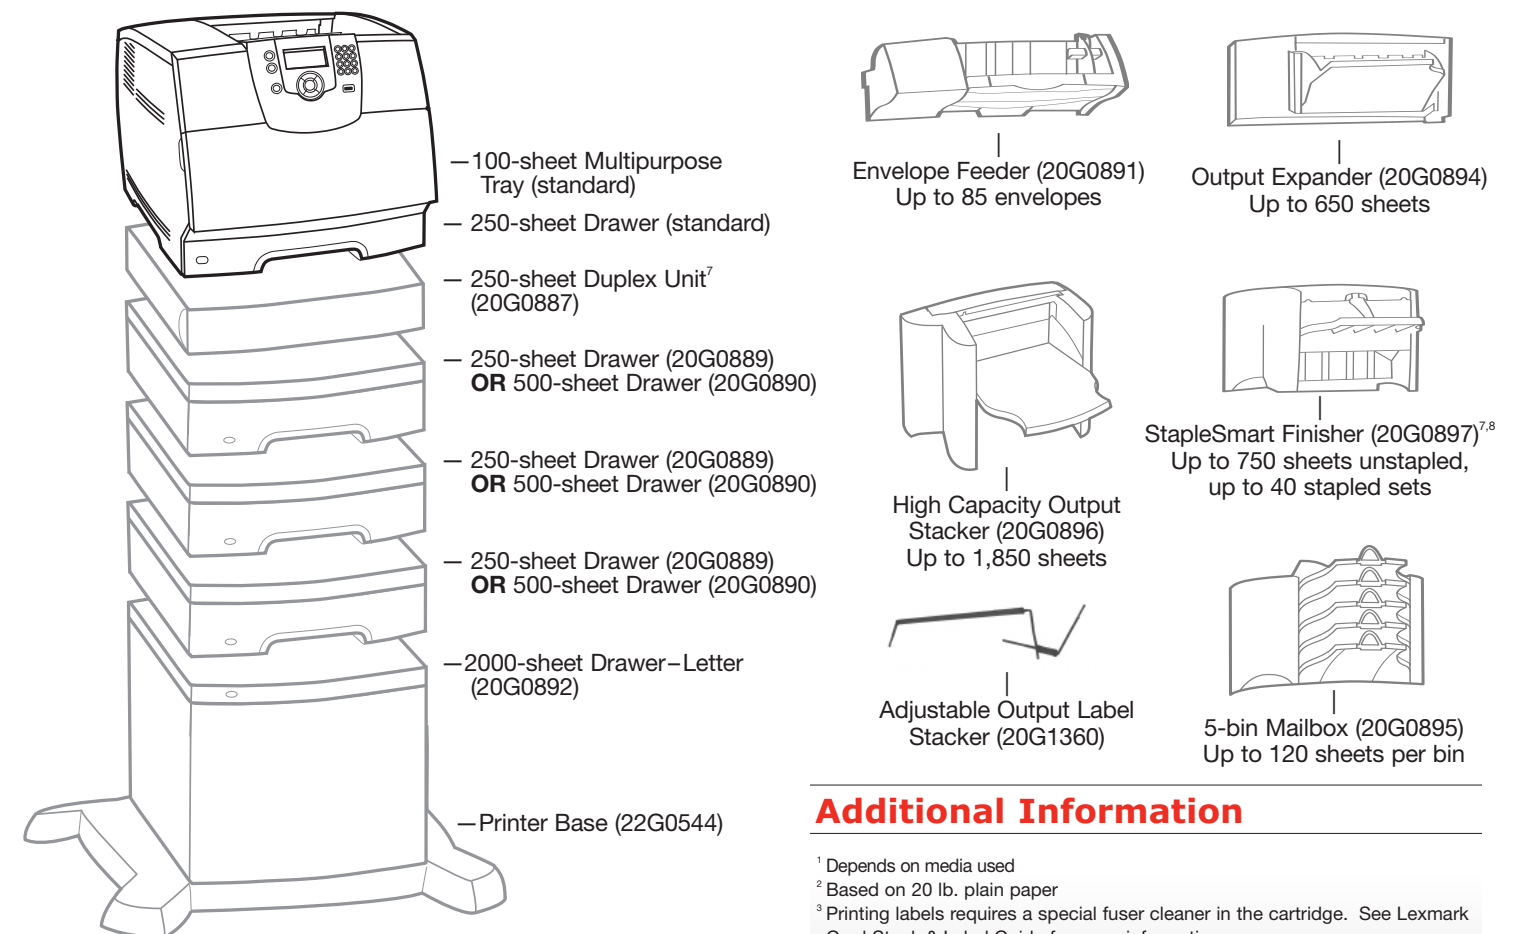

Options not pictured:

- 250-sheet Tray (20G0879)
- 500-sheet Tray (20G0884)⁹
- 250-sheet Universally Adjustable Drawer (20G1223)
- 250-sheet Universally Adjustable Tray (20G1224)¹¹
- 400-sheet Universally Adjustable Drawer (20G1218)
- 400-sheet Universally Adjustable Tray (20G1217)¹⁰

Additional Information

- ¹ Depends on media used
- ² Based on 20 lb. plain paper
- ³ Printing labels requires a special fuser cleaner in the cartridge. See Lexmark Card Stock & Label Guide for more information
- ⁴ Testing is recommended for specific tag and label compatibility
- ⁵ Declared standard page yield value in accordance with ISO/IEC 19752
- ⁶ Designed for use only in the USA and Canada
- ⁷ Not to be used with RFID media
- ⁸ Can staple a maximum of 25 sheets per set
- ⁹ Requires optional 500-sheet drawer
- ¹⁰ Requires optional 400-sheet universally adjustable drawer
- ¹¹ Requires optional 250-sheet universally adjustable drawer